


VAYU 2.0
Rechargeable Tyre Inflator



PACKAGE CONTENTS

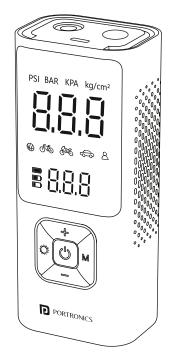

Ball Needle

Adapter







Presta Valve


Adapter







Product Overview:




NOTE

- Before inflating, please ensure that the battery level is sufficient.
- Please check the required pressure for the items by reading the instructions or using other means to prevent injuries caused by over-inflation.
- Ensure that both ends of the air hose are securely connected to the inflator and the valve of the item before inflation.
- The air hose and the joint may become very hot after inflating. Please do not touch them for an extended period to avoid burns when unscrewing the air hose.

HOW TO USE



). Insert the air hose tightly into the air hose interface, and then long-press θ for 3 seconds to turn on the appliance.



2. Screw the appropriate valve adapter onto the air hose. Then, connect the other end of the air hose to the valve on the item to be inflated. The LED screen will display the current pressure value.



3. Press M to choose the inflation mode.



4. Long-press **M** to select the unit among PSI, BAR, KPA, and KG/CM². When you choose the desired inflation mode, press + or - buttons to preset the desired pressure.



5. Press & to start inflation. Press again to pause the appliance.



6. When the preset pressure is reached, it will shut off automatically. Long-press σ button for 3 seconds to turn off the appliance.

PRODUCT PARAMETERS

Rated Power: 80 Watts

Input: 5 V --- 2 A

Battery Capacity: 6,000 mAh

Pressure Measurement Accuracy: ± 1 PSI

Pressure Units: PSI, Bar, KPA, Kg/cm²

Pressure Range: 3~150 PSI Hose Length: 7.9 inches

Dimensions (inches): 6.5 x 27 x 2.0

4 BUILT-IN INFLATION MODES











www.portronics.com

For Support

Visit: www.portronics.com Email: help@portronics.com Contact No.: +91 9555245245, 011-42413131

(Working Hours : Mon - Sat, 10 am - 6 pm)



For E-waste & ROHS compliance refer to http://www.portronics.com/ewaste.html