



# TALK ONE

Noise Cancellation Conference Speaker

User Manual

### Introduction :

Thanks for choosing our portable conference speakerphone. This is a multifunctional Bluetooth speaker with professional-quality for meetings at home, in office or on-the-go. You can use it as a basic Bluetooth speaker too. If you want to have a better experience, please read this instruction carefully.



Important : Your speakerphone is shipped from the factory in a deep sleep mode to conserve battery. Activate your speakerphone by connecting the USB cable to a power source before first use.

### Package Contents :

- Talk One
- Carry Case
- Data Cable
- Aux Cable


### Package Overview :

- 1 Phone call button
- 2 Volume down
- 3 Power button
- 4 Mute button
- 5 Volume up
- 6 Pause/Play
- 7 Status LED
- 8 USB port (Type-C) for charge in
- 9 Audio input port

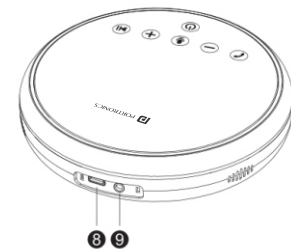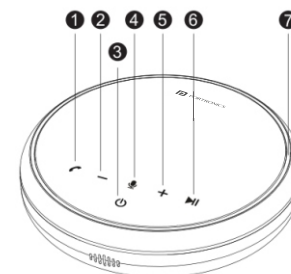

### USB Mode :


a) Connect to your computer by using a USB-C data cable.

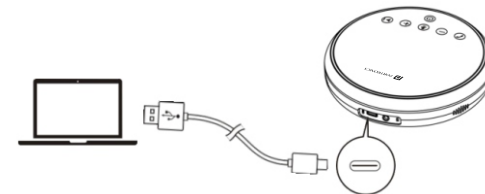

Now you can enjoy your music & calling feature without any hassle.

### Bluetooth Mode :

b) Connect to your computer or mobile device via Bluetooth pairing. Power on this product for the first time, it will automatically enter the Bluetooth pairing mode. (Note: in our sample, usually the Bluetooth pairing name is "Portronics Talk One")

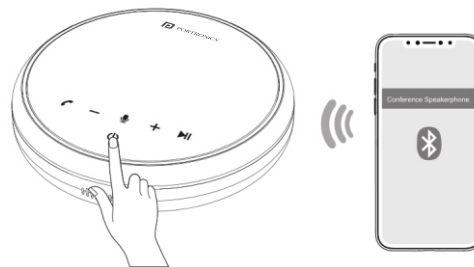

	Flashes blue quickly	Enter Bluetooth pairing mode
	Flashes blue every 5 seconds	Bluetooth paired

Each time you power on the product, it will automatically connect with the last successfully connected device if available.\*\*\*

### Powering On/Off

Press and hold the power button for 3 seconds to power on. The status LED will light on counterclockwise and then fade out. To power off, press and hold the power button for 3 seconds.

### Power LED Behavior

	Flashes light purple slowly and turns blue and flashes quickly in circles	Power On
	Flashes red in circles and light off	Power Off

Once connected to your computer, it will automatically power on. It will automatically power off after 4 minutes of inactivity when the Bluetooth is not paired.

### Button Controls

	Press	Volume Up/Down
	Press	Answer / End a call
	Press and hold for 2 seconds	Reject a Call
	Press	Mute or restore the microphone
	Press	Play/Pause music

### Status LED behaviors

Steady purple	USB connected to computer
No LED Flash but a "beep"	Coming call
Lights up blue counterclockwise or counterclockwise	Increase or decrease volume
Steady red	Muted
Lights up red	Press Power button to check the battery level
Steady blue	Aux connected
Flashes blue every 5 seconds	Bluetooth paired

### Charging

### Power LED behavior

Steady purple	Being charged
Light off	Fully charged
Flashes red	Low battery

### Aux Mode :

Connect an external audio source to the AUX jack of this product by using an AUX cable (included). The audio will be played through the speakerphone (mic. will not work).

### Specifications :

- Bluetooth Version : V5.3
- Bluetooth distance : 10 meters
- Microphone : Omni directional MIC (3PCS)
- Microphone sensitivity : 27dB;
- Microphone distortion : ≤3%;
- Microphone SNR : 70dB;
- Microphone Coverage : 5 meters
- Talk time : up to 12 hours (under max volume)
- Music streaming : up to 10 hours (under max volume);
- Rechargeable Battery : 2600mAh
- Connectivity : Bluetooth/USB/Aux
- Speaker :  $\Phi$  52\*23mm, 4 $\Omega$ , 3 Watts;
- Dimension :  $\Phi$  130\*35.5mm;
- Weight : 300gm
- Charging time : 3 hours

### DOS AND DON'TS

To ensure safe operations for your speaker, please follow these rules:

1. Always place the speaker in a safe location.
2. Avoid excessive pressure on either equipment.
3. When not in use, switch off the speaker and unplug them from the power source.
4. If the product is defective, kindly do not attempt to fix it yourself. We recommended professional help.
5. Keep the product away from water, to not cause internal damage.

www.portronics.com  
 For Support  
 Visit : www.portronics.com  
 Email : help@portronics.com  
 Contact No : +91 9555245245 , 011-42413131  
 (Working Hrs : Monday - Saturday 10:00am - 6:00pm)



For E-waste & ROHS compliance refer to  
<http://www.portronics.com/ewaste.html>